


DESCRIPTION

GATE-C3000 lets check, change parameters, and control a C3000 using a PC or mobile device (smartphone, tablet) as local mode (ethernet or wifi) and remote mode (www.itc-cloud-manager.com).

GENERAL COMMUNICATION SCHEMA

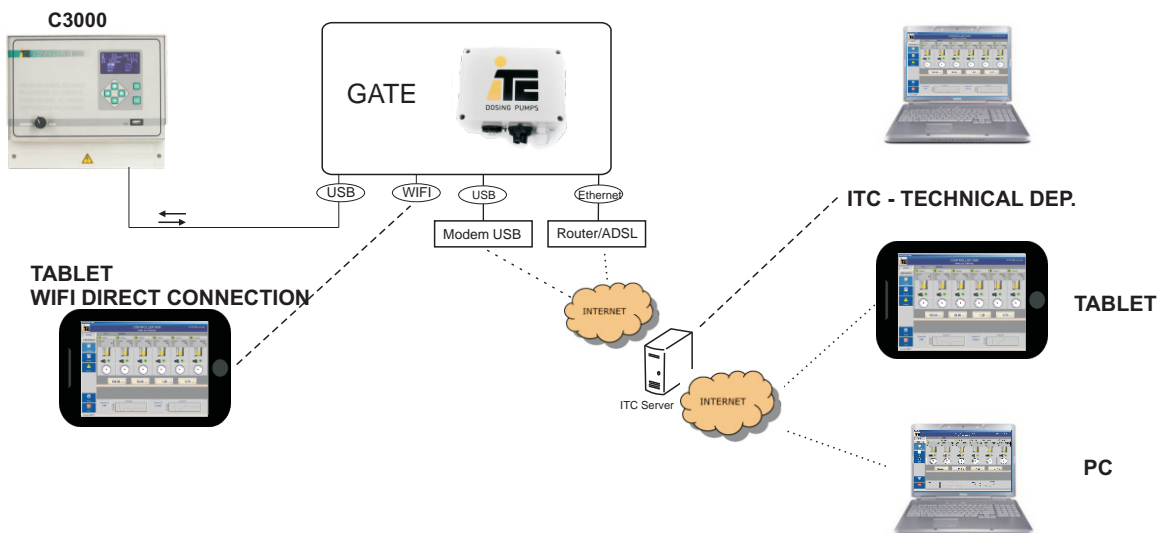

TECHNICAL FEATURES


Supply voltage: 85-264Vac, 50/60Hz
 Power: 6W
 Temperature: 0-45°C
 Relative humidity: 0-95% no condensation
 Dimensions: 160x80x90mm
 Connectivity:
 Ethernet, ADSL connection, router 3G.
 Modem USB, accessory for good telephonic reception without outdoors antenna
 Wifi, for a direct connection using a tablet.

Ref.: 01-001



ACCESSORIES

- 40653 Modem USB 3G
- 01-015 Router 3G with indoors antenna and 1m ethernet cable IP 68
- 01-013 1m ethernet cable IP 68
- 01636 Outdoors antenna with 5m cable

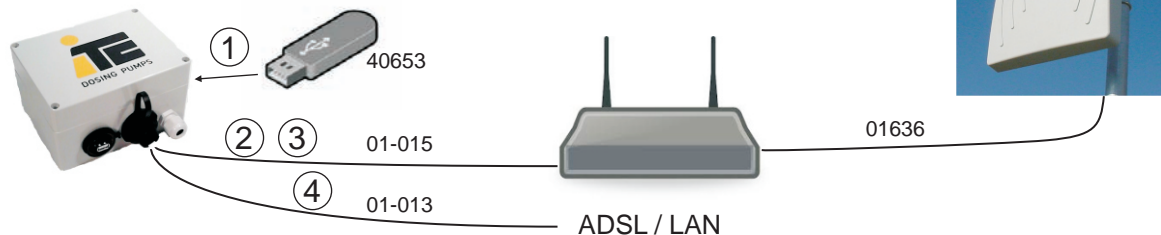

OPTIONS:

- 1.- GATE(01-001)+ modem USB(40653), for good reception.
- 2.- GATE(01-001)+ Router 3G (01-015), for medium reception.
- 3.- GATE(01-001)+ Router 3G (01-015) + outdoors antenna (01636), for poor reception.
- 4.- GATE(01-001)+ ethernet cable (01-013), to connect at the customer LAN.

FUNCTIONALITIES:

To check, change parameters, and control a C3000 can be done using a web browser (Explorer, Firefox, Chrome, Safari) in real time.

CONTROL PANEL: Real time readings.

← Irrigation active program.

← Dosing pumps and its flow.

← Readings: Flow, Pressure, EC, and pH.

DATA LOGGER

GATE saves data in XML, so it can be imported directly from a spreadsheet like Excel.

CONFIGURATION

To set up a Controller 3000:
W Programs, F Programs, and Configuration.